

## **MAYOR**

HONORABLE DONNALEE LOZEAU

## BOARD OF PUBLIC WORKS

DONNALEE LOZEAU - CHAIR TIMOTHY LAVOIE - VICE CHAIR PAUL G. BERGERON **KEVIN S. MORIARTY** TRACY PAPPAS

## DIRECTOR OF PUBLIC WORKS

LISA FAUTEUX

## CITY ENGINEER


STEPHEN DOOKRAN, P.E.



CITY OF NASHUA, NEW HAMPSHIRE

# LAKE STREET CURBING IMPROVEMENTS


FEBRUARY 2015

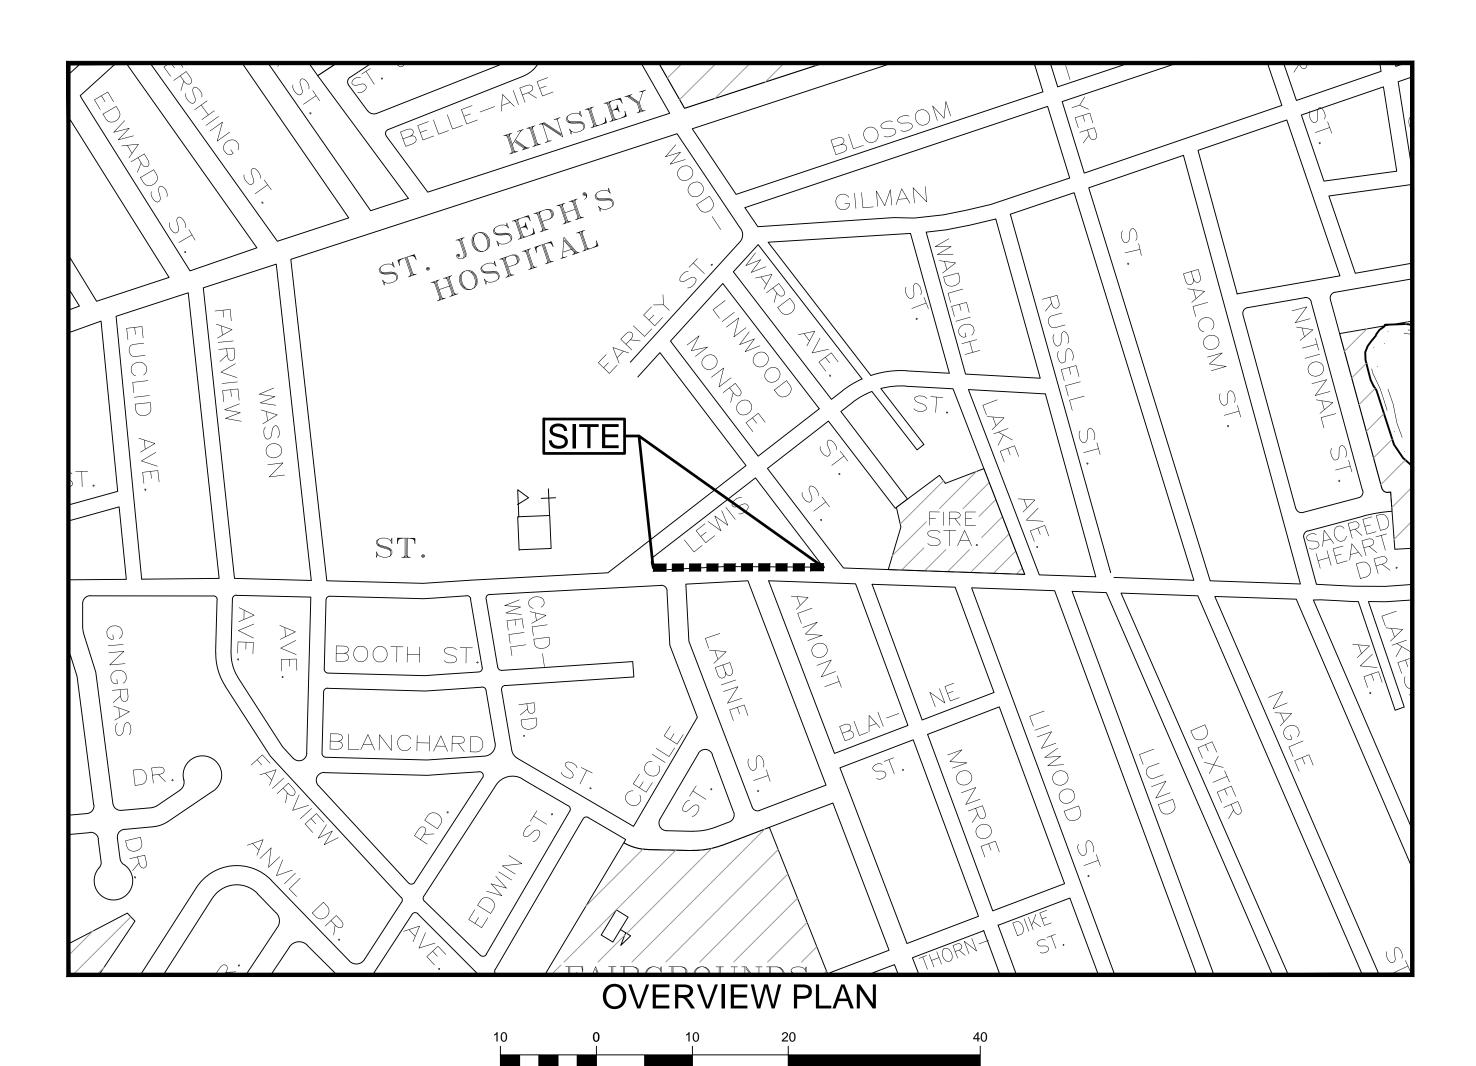

HORIZONTAL SCALE IN FEET

## DRAWING INDEX

- **COVER SHEET**
- **EXISTING CONDITIONS PLAN**
- PROPOSED IMPROVEMENTS
- **DETAIL SHEET**



#### PROJECT DESCRIPTION:


SIDEWALK IMPROVEMENTS ALONG THE NORTHERLY SIDE OF LAKE STREET FROM LEWIS STREET TO MONROE STREET.

PREPARED BY:






CITY ENGINEER'S OFFICE 9 RIVERSIDE STREET NASHUA, NEW HAMPSHIRE 03062

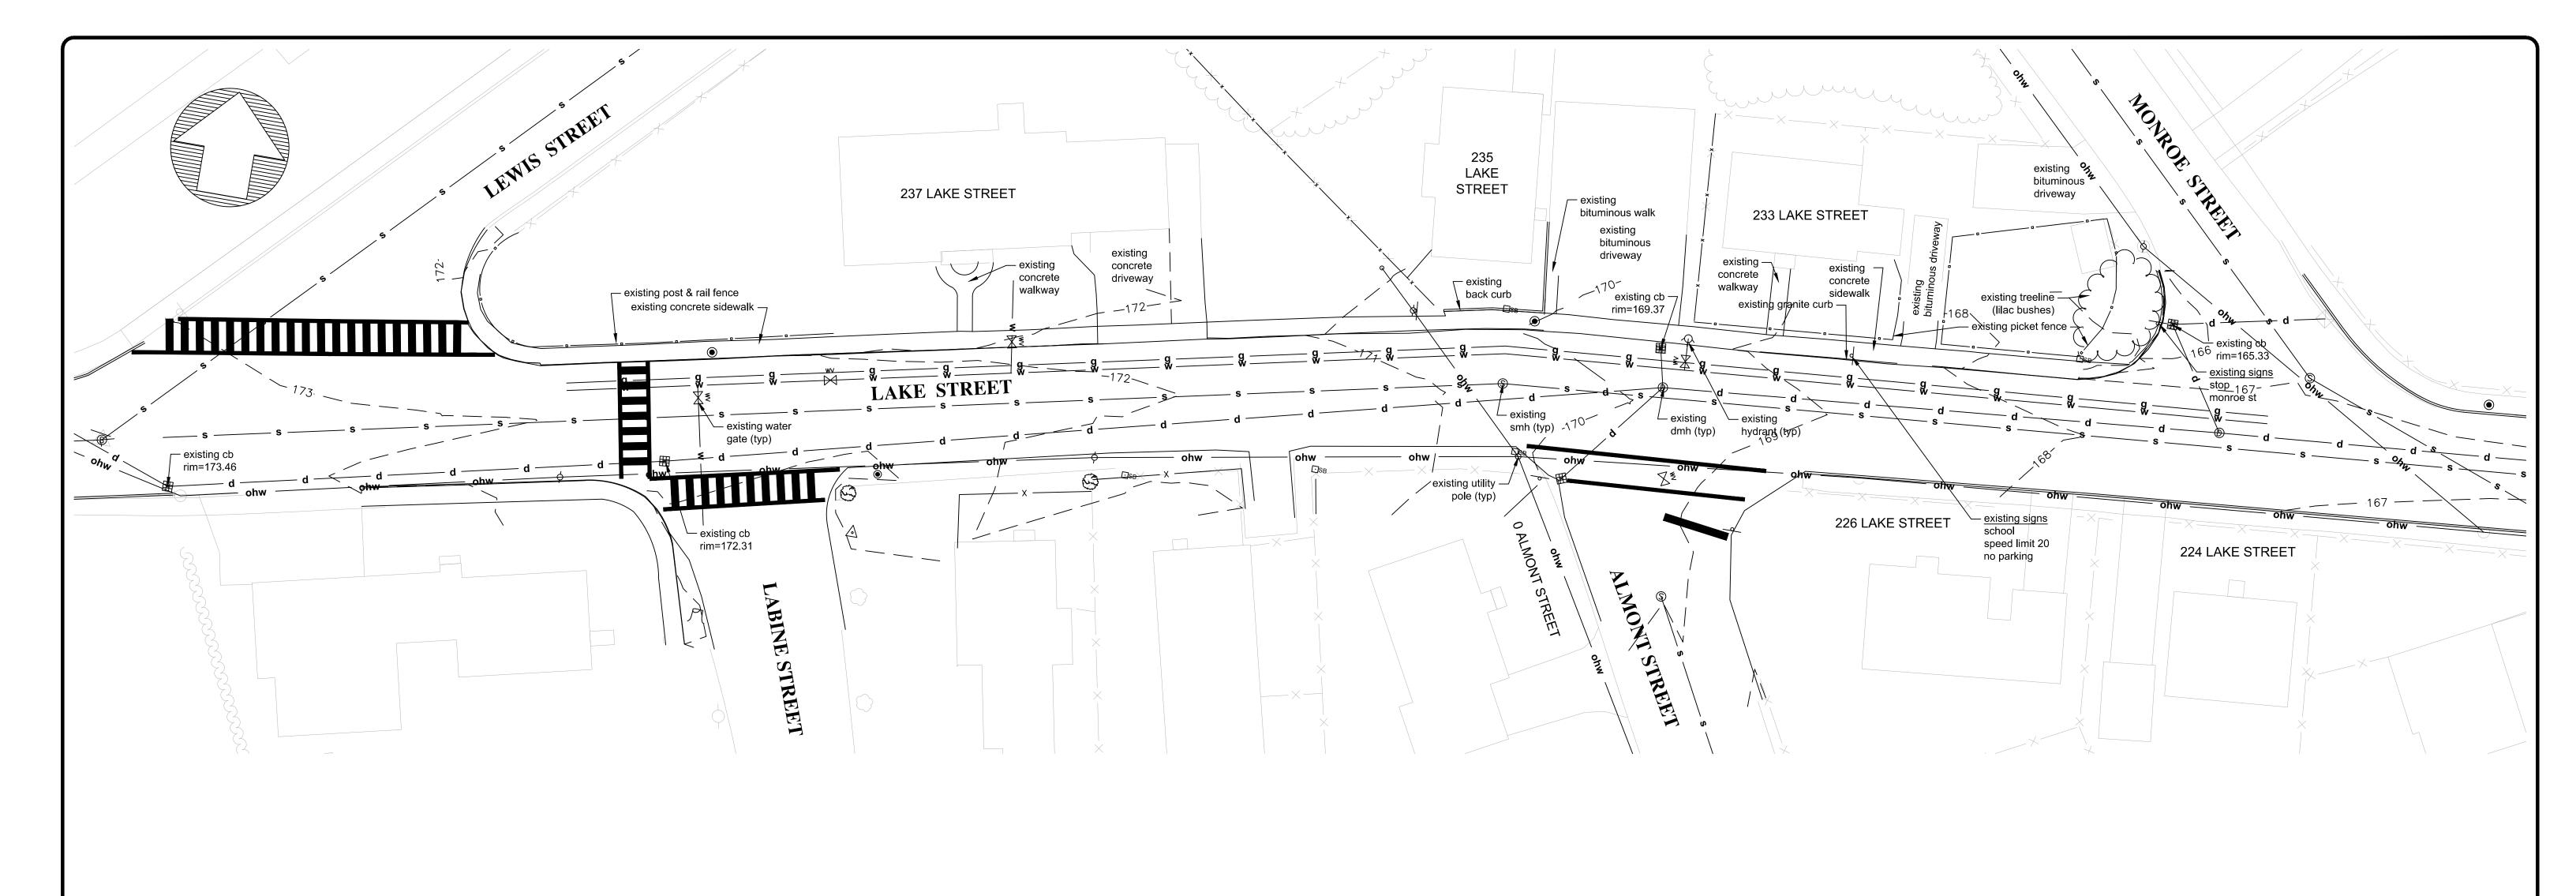


#### NOTES:

- THIS PLAN WAS COMPILED USING FIELD SURVEY OF THE SITE PERFORMED BY CITY OF NASHUA IN 2014.
- PROJECT CONSTRUCTION NOT GOVERNED BY THE CITY OF NASHUA STANDARD SPECIFICATIONS SHALL BE CONSTRUCTED IN ACCORDANCE WITH NHDOT STANDARD SPECIFICATIONS DATED 2010, CURRENT "STANDARD PLANS FOR ROAD AND BRIDGE CONSTRUCTION" AND SUPPLEMENTAL SPECIFICATIONS AND SPECIAL PROVISIONS.
- THE CONTRACTOR IS RESPONSIBLE FOR MAKING HIS OWN DETERMINATIONS AS TO THE TYPE AND LOCATION OF UNDERGROUND UTILITIES AS MAY BE NECESSARY TO AVOID DAMAGE THERETO. DAMAGE CAUSED BY THE CONTRACTOR'S OPERATION WILL BE PROMPTLY REPAIRED WITH ALL ADDITIONAL COST BORNE BY THE CONTRACTOR AND THE SATISFACTION OF THE CITY AND ENGINEER.
- LOCATION AND SIZE OF EXISTING PIPES AND OTHER UNDERGROUND UTILITIES ARE NOT WARRANTED TO BE EXACT OR COMPLETE.
- 5. THE CITY OF NASHUA (PUBLIC WORKS/TRAFFIC/POLICE) SHALL BE NOTIFIED PRIOR TO ANY WORK REQUIRING TRAFFIC IMPEDANCE, ROADWAY, SEWER OR DRAINAGE STRUCTURE DISTURBANCE. CONSTRUCTION MAY ONLY BEGIN AFTER AUTHORIZATION FROM THE APPROPRIATE CITY DEPARTMENT.
- 6. THE ENGINEER SHALL BE NOTIFIED PRIOR TO CONSTRUCTION IF THERE ARE ANY DISCREPANCIES IN PLANS OR EXISTING DATA. CONSTRUCTION SHALL NOT PROCEED WITHOUT WRITTEN PERMISSION FROM THE ENGINEER.
- 7. ALL EROSION CONTROL FACILITIES SHALL BE MAINTAINED AS OFTEN AS REQUIRED BY WEATHER CONDITIONS.
- 8. THE CONTRACTOR MUST CONTACT DIG SAFE AT 1-888-344-7233 AT LEAST THREE WORKING DAYS (72 HRS) PRIOR TO COMMENCEMENT OF CONSTRUCTION. COORDINATE WITH CITY OF NASHUA PUBLIC WORKS PERSONNEL FOR ADDITIONAL DIG SAFE REQUIREMENTS.
- 9. STREET RESTORATION IN ACCORDANCE WITH NRO 285-13.



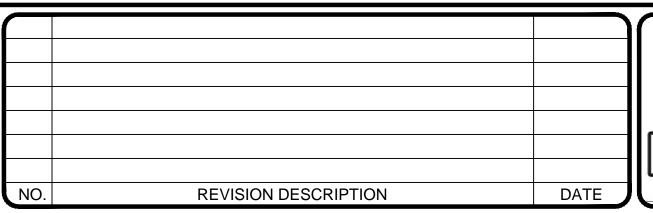



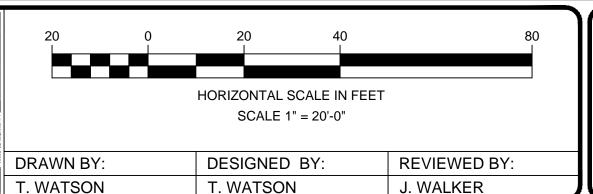



2014


SEPTEMBER

### PLAN OF LAKE STREET **CURBING IMPROVEMENTS**

NASHUA, NEW HAMPSHIRE

**EXISTING CONDITIONS** 


233-237 LAKE STREET SHEET

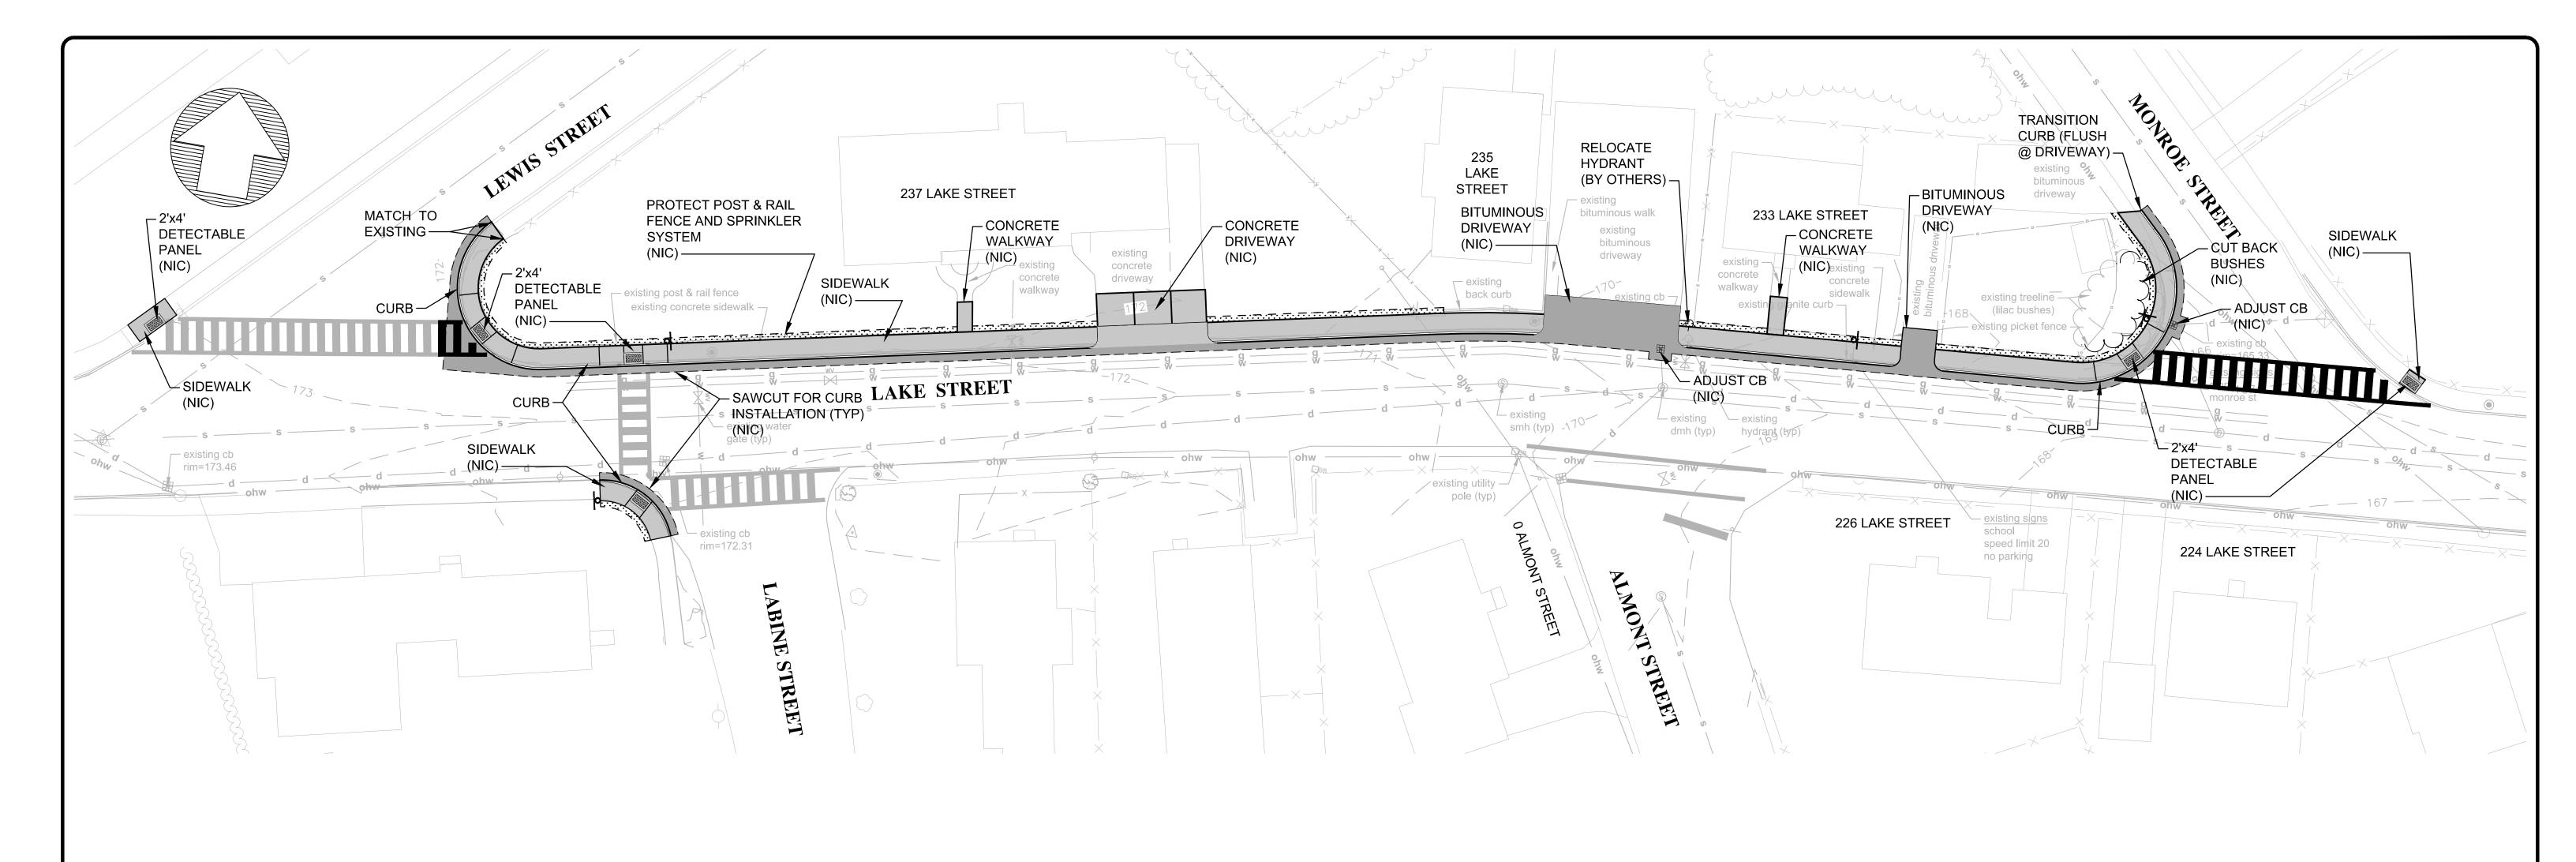

#### NOTES:

- 1. SITE IMPROVEMENTS SHALL CONFORM TO TITLE III OF THE AMERICANS WITH DISABILITIES ACT.
- 2. IT SHALL BE UNLAWFUL TO MODIFY, CHANGE OR ALTER ANY STRUCTURE SHOWN ON THIS PLAN IN ANY WAY WHATSOEVER, OR CONVERT OR ALTER ANY STRUCTURE WITHOUT RECEIVING APPROVAL FROM THE CITY.
- 3. ALL PIPE WORK, STRUCTURES AND SIDEWALK SHALL BE INSTALLED PER CITY OF NASHUA SEWER, DRAINAGE AND ROADWAY REQUIREMENTS.
- 4. STAGING AREA TO BE COORDINATED BY THE CONTRACTOR PRIOR TO THE START OF CONSTRUCTION AND APPROVED BY THE CITY.
- GRADING AND CURB REVEAL TO BE DETERMINED & APPROVED PRIOR TO CURB INSTALLATION.



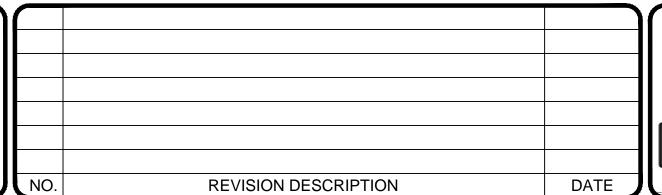



20 0	20	40	80
HORIZONTAL SCALE IN FEET  SCALE 1" = 20'-0"			
DRAWN BY:	DESIGNED BY:	REVIEWED	BY:

J. WALKER

T. WATSON



2014

CURB

LAKE STREET
CURBING IMPROVEMENTS


PROPOSED WORK


NASHUA, NEW HAMPSHIRE

PROPERTY LOCATION

233-237
LAKE
STREET

SHEET

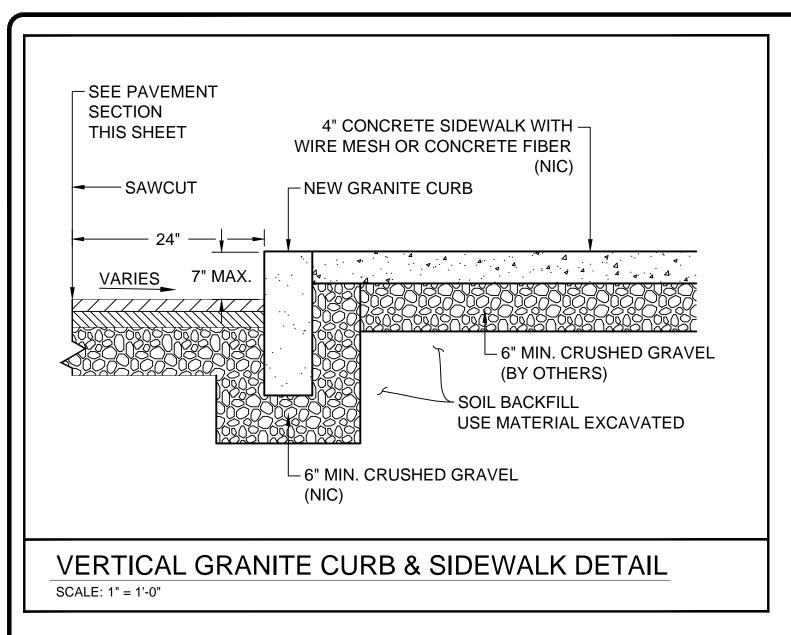


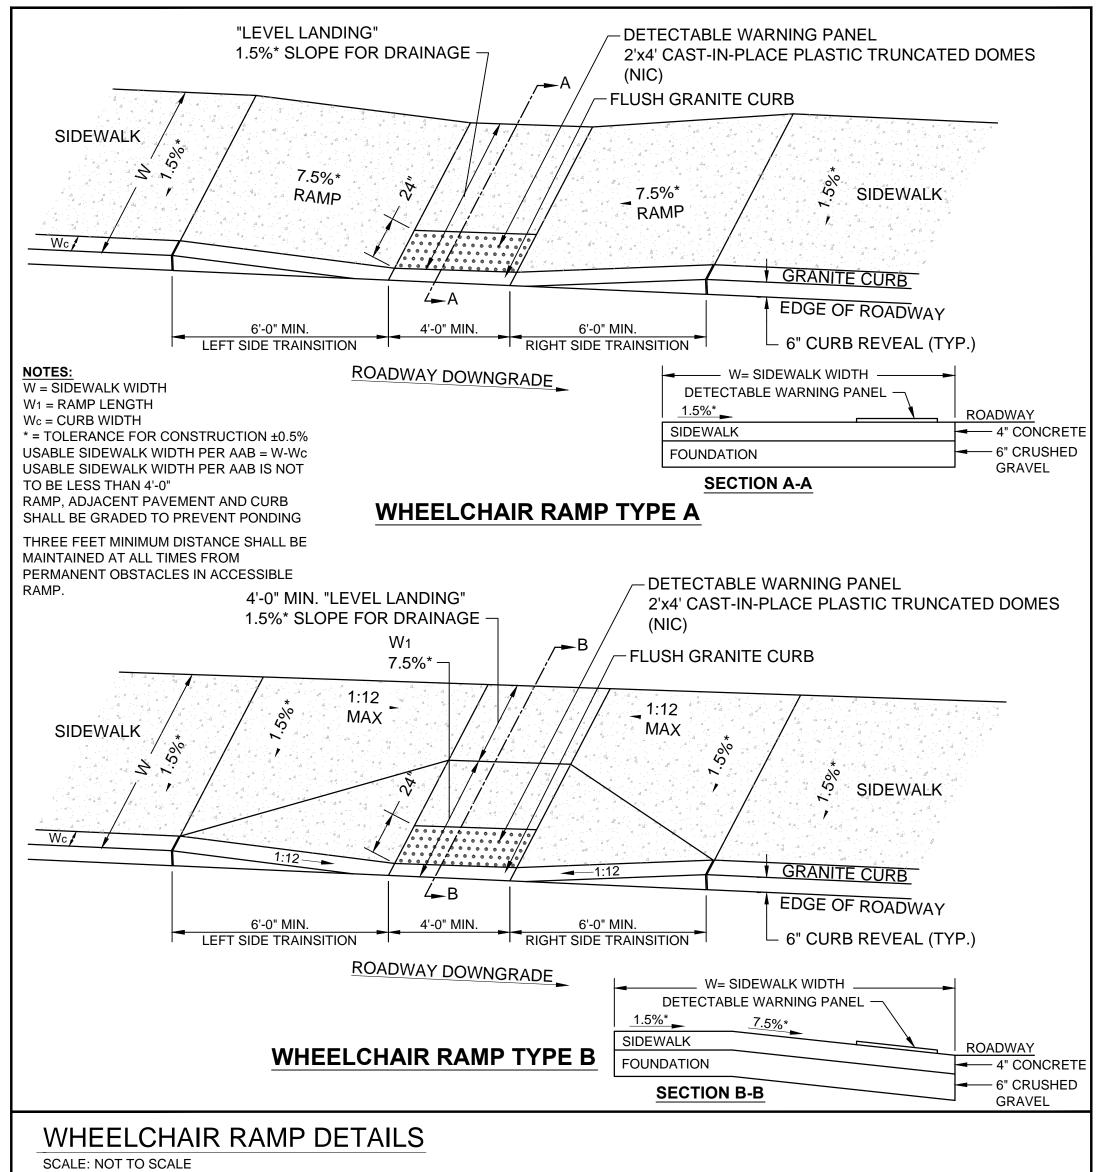

NO.





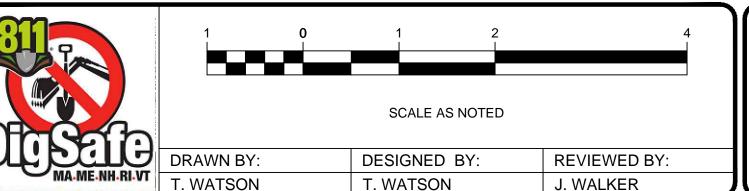



2014

NASHUA, NEW HAMPSHIRE PLAN OF LAKE STREET **CURBING IMPROVEMENTS** 

**DETAIL SHEET** 

PROPERTY LOCATION
233-237
LAKE
STREET SHEET